

HE-VA KING-ROLLER

Cover more ground more quickly
with HE-VA's widest roller



**HE-VA**
KING-ROLLER

Supreme contour following ensures consistent, high quality results across the field


With working widths of 12.5 m or 15.3 m, the new HE-VA King-Roller meets the increasing demand for wider and heavier rolls.

The King-Roller is a 5 section roll with working widths of 12.5 m or 15.3 m. The King-Roller is available with 6 different ring types, including the big 24"/620 mm Cambridge rings. The rings are mounted on 60 mm special steel axles suspended in double sealed flange ball bearings. On the 15.3 m roll the centre section and the inner sections are mounted with support bearings.

Unique SAT-System

The King-Roller's hydraulic folding system is linked to two accumulators and a pressure gauge. The pressure gauge allows the operator to set the weight transfer level to ensure even consolidation across the full width.

The King-Roller's main frame is supported by the two inner sections. By this SAT-system the necessary part of the roll's weight is transferred to the centre and the outer sections.

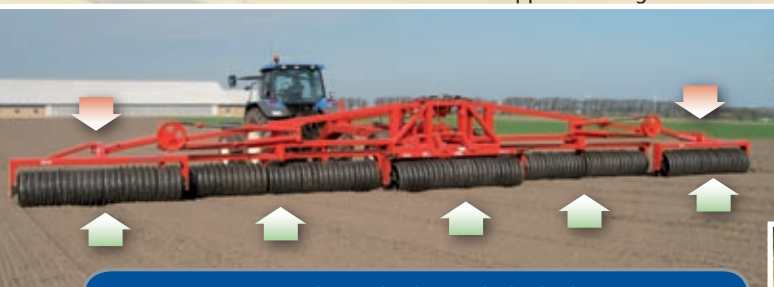

FREE FLOATING ROLLER SECTIONS

All five roller sections are centre suspended and with independent flotation resulting in a perfect contour following of the King-Roller. Moreover, the centre section follows the contour of the field independently of the tractor, as the drawbar is equipped with a pivotal towing eye.



The King-Roller quickly folds down horizontally to a transport width of less than 3 m.

TECHNICAL SPECIFICATIONS

Working width	Transport width	Ring type	Ring size	No. of rings	Weight (kgs)	Power req., HP
12.5 m	3 m	Cambridge	510mm (21")	241	8270	170-200
12.5 m	3 m	Cambridge	620mm (24")	241	9710	190-220
12.5 m	3 m	Cam	550mm (22")	85	6610	150-190
12.5 m	3 m	Crosskill	485-530mm	125	7870	170-200
12.5 m	3 m	Corrugated	505mm	250	7890	170-200
12.5 m	3 m	Plain	505mm	42	7050	170-200
15.3 m	3 m	Cambridge	510mm (21")	295	9730	180-230
15.3 m	3 m	Cambridge	620mm (24")	295	11490	200-250
15.3 m	3 m	Cam	550mm (22")	102	7700	170-220
15.3 m	3 m	Crosskill	485-530mm	153	9240	180-230
15.3 m	3 m	Corrugated	505mm	306	9260	180-230
15.3 m	3 m	Plain	505mm	51	8200	180-230

YOUR LOCAL HE-VA DEALER



N. A. Christensensvej 34
DK-7900 Nykøbing Mors
Tel: +45 9772 4288
Fax: +45 9772 2112

Email: info@he-va.com
Web: www.he-va.com

Due to our company policy of continual improvement we reserve the right to change specifications and/or prices without prior notification